

Technical Data Sheet UNFINISHED PARQUET



Product Constructions:

Unfinished parquet is made out of solid wood completely, with only one layer of wood.

Grading Specifications:

According to EN 13487 are fulfilled by manufacturing grading.

Profile System:

S4S System: No joints

T&G System: Tongue and Groove

Bevel: Micro bevel on 4 sides on request or large width parquet

Dimensions of unfinished parquet

Thickness / width / Length

10x55/60x250/300mm

14x70x400/450/500mm

15x90x400-1000mm

22x90/120/140x700-1800mm

Wood species

Acacia, Beech, European Oak, Ash, Maple, European Walnut, European Cherry, Iroko, Olive, Afrosia, Wenge,

Moisture content

Flooring layer 5 to 10 %

Finishes and Treatments:

Polish UV oiling Treatment

Bleaching & Colored impregnating

7 layers UV coating

- Mat Finish

- Semi Gloss

- Shine Polish

Installation:

1 Laying Glued: The parquet instead glued to the floor, it is glued directly on concrete below previous flooring without any need of thin mat designed especially for wood flooring.

Instructions how to clean flooring:

1. Use a damp cloth
2. Use neutral detergents and non foaming products to receive the best care for your wood flooring.
3. Recommended to use a detergent suitable for wood flooring able to purchase in most supermarkets.

Classification

Name of Requested	Test Method
Response to fire	EN 14342, table 1
Formaldehyde Emissions	EN 717-2
Pentachlorophenol content	EN 14823
Strength Limit (max load)	EN 1533
Sliding degree (in duty state)	EN 1339
Thermal conductivity	EN 14342, table 2
Biological Resistance	EN 335-2006 classe 1,2

Floor Structure



CERTIFICATE



CE - Conformité Européenne
Direttiva 89/106/CEE
Direttiva 2001/95/CE



Technical Data Sheet PREFINISHED PARQUET



Product Constructions:

Two or Three-layer parquet is a multi layer parquet formed from top layer from hard wood also known as noble layer and from other wooden layers or wooden base material, glued, processed according to the European standard EN13489

Grading Specifications:

According to EN 13487 are fulfilled by manufacturing grading.

Profile System: Profilo

Tongue and groove (T&G) with requested Micro bevel on 4 sides

Dimensiones of prefinished parquet

Thickness / width / Length

10x70/90x500-1200mm

14/15x90/120/140/160x600-2400mm

15x180/190x1830-2200mm

Wood species / Tipo di Legno

Acacia, Beech, European Oak , Ash, Maple , European Walnut, European Cherry, Iroko, Olive , Afromosia, Wenge ,

Moisture content

Noble Top layer 5 to 10 %

Finishes and Treatments:

Polish UV oiling Treatment

Bleaching & Colored impregnating

7 layers UV coating

- Mat Finish

- Semi Gloss

- Shine Polish

Installation:

1. Floating installation: The parquet rests simply on the floor without glue, between the floor and the flooring is place above a thin mat designed especially for wood flooring.
2. Laying Glued: The parquet instead glued to the floor , It is glued directly on concrete below previous flooring without any need of thin mat designed especially for wood flooring.


Instructions how to clean flooring:

1. Use a damp cloth
2. Use neutral detergents and non foaming products to receive the best care for your wood flooring.
3. Recommended to use a detergent suitable for wood flooring able to purchase in most supermarkets.

Classification

Name of Requested	Test Method
Response to fire	EN 14342, table 1
Formaldehyde Emissions	EN 717-2
Pentachlorophenol content	EN 14823
Strength Limit (max load)	EN 1533
Sliding degree (in duty state)	EN 1339
Thermal conductivity	EN 14342, table 2
Biological Resistance	EN 335-2006 classe 1,2

Floor Structure

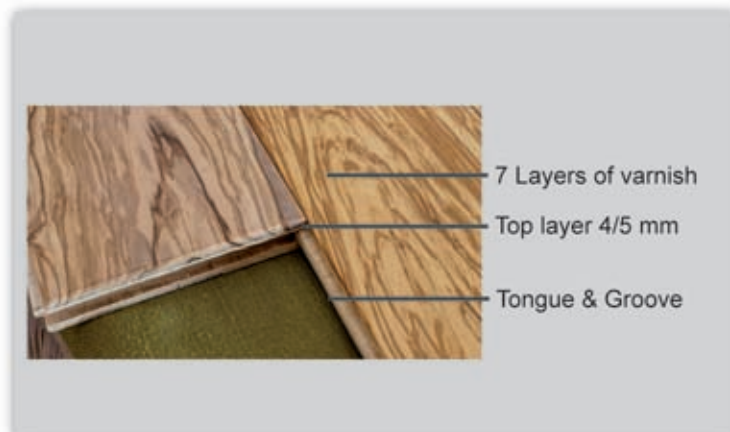

CERTIFICATE



CE - Conformité Européene
Direttiva 89/106/CEE
Direttiva 2001/95/CE

